


# TWER2M Twin Hook



KITO Twin Hook electric chain hoist, which is equipped with a single motor and two hooks, is intended to lift the hooks horizontally, equally and safely. This product is the most suitable for lifting applications requiring two lifting points for a wide load or retaining a level lifting. For special requirements such as dual speed or curve beam, consult with the nearest KITO dealer.

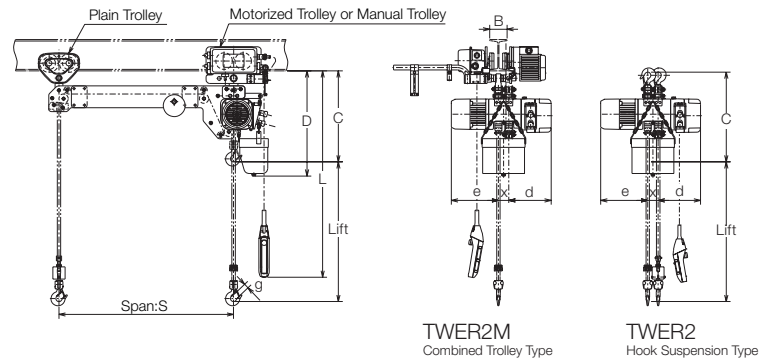

## Specifications

Capacity (t)	Product Code	Hoist Body	Standard Lift (m)	Push Button Cord L (m)	ER2				Trolley					Test Load (t)	
					Lifting Motor		Lifting Speed (m/min)		Load Chain Diameter (mm) x Chain Falls	Traversing Motor		Traversing Speed (m/min)			Flange Width B (mm)
					Output (kW)	Rating (%ED)	50Hz	60Hz		Output (kW)	Rating (%ED)	50Hz	60Hz		
125kg + 125kg	TWER2M003S	C			0.56	60	9.2	11.0	6 x 2	0.4	40	20 (10)	24 (12)	58 to 153	156kg x 2
250kg + 250kg	TWER2M005L						3.8	4.6							7.3
500kg + 500kg	TWER2M010L	D	3	2.5	0.9	60	3.5	4.2	7.7 x 2	0.4	40	20 (10)	24 (12)	58 to 153	625kg x 2
	TWER2M010S						7.1	8.5							1.25 x 2
1 + 1	TWER2M020L	E			1.8	60	3.7	4.4	10.2 x 2	0.4	40	20 (10)	24 (12)	82 to 178	1.25 x 2
	TWER2M020S						7.0	8.4							1.25 x 2
1.5 + 1.5	TWER2M030S				3.5		4.4	5.3	10.2 x 4					100 to 178	1.88 x 2
2.5 + 2.5	TWER2M050S	F		2.8			2.9	3.5	11.2 x 4	0.75				100 to 178	3.13 x 2

Note: The bracketed figures in Traversing Speed are low speed. This product is designed for straight beams. Specify a beam width at the time of quotation or order.

The following information will be provided upon your request: 1) precise weight depending on length of the hook span 2) availability of curve beams 3) availability of a lift exceeding the maximum (8m)

## Dimensions (mm)

Capacity (t)	Product Code	Headroom C		D	S	d	e	g	x	
		With Trolley	Hook							
125kg + 125kg	TWER2M003S						271			
250kg + 250kg	TWER2M005L	535	525	620	Min. 510	242	271	27	60	
	TWER2M005S						268			
500kg + 500kg	TWER2M010L	615	620	710	Min. 530	291	298	31	71	
	TWER2M010S						307			
1 + 1	TWER2M020L	800	830	790	Min. 650	308	338	39	81	
	TWER2M020S						356			
1.5 + 1.5	TWER2M030S	970	995	920				44		
2.5 + 2.5	TWER2M050S	1020	1025	990			337	399	47	85

Note: Maximum hook span (S) is 4m. Longer span is also available so contact the nearest KITO dealer.